


STANDARD COMPOSITE OIL

Abrasion resistant hoses

CHARACTERISTICS Multi-layer thermoplastic hose made of polypropylene, with high density polyethylene reinforcements and polyester fabric exterior covered in vinyl. Weather and ozone resistant. Depending on the version (PZ, PX, XZ, XX), the internal and external reinforcements are made of one material or another.

APPLICATIONS Ideal hose for suction and pumping of a wide variety of hydrocarbon products, including fuel oils, petroleum, diesel, lubricant oils, kerosene, MTBE and 100% aromatics.

TEMPERATURES From -30°C to +80°C.

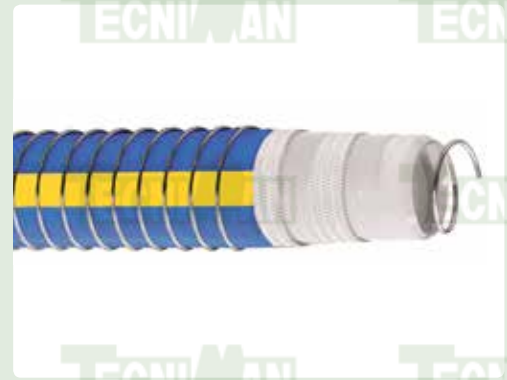

∅ Interior mm.	Bar Pressure	Safety factor	Curv. Radius	Length mts.
40	10	5:1	140	40
50	10	5:1	180	40
65	10	5:1	220	40
75/80	10	5:1	180	40
100	10	5:1	400	40
150	10	5:1	575	40
200	10	5:1	800	40

	Int. Reinforcement	Ext. Reinforcement
OIL SD ZZ	Galvanised steel	Galvanised steel
OIL SD ZX	Galvanised steel	Stainless steel
OIL SD XX	Stainless steel	Stainless steel
OIL SD AZ	Aluminium	Galvanised steel
OIL SD AA	Aluminium	Aluminium

Code AL4