


FLAT TM

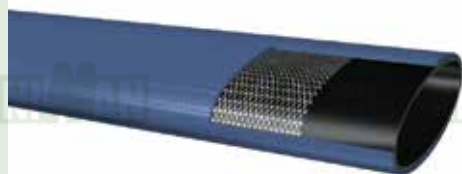

CHARACTERISTICS

Flat flexible hose made of non-toxic plasticised PVC, with interior polyester fiber reinforcement in compliance with ISO 8029 and ISO 7751 standards. Its textile interior reinforcement allows it to withstand average working pressures and thanks to its flat structure, it is very easy to handle, easily rolled up and does not take much space. Great flexibility, permeability and lightness. Non-toxic but not for food use. Ca/Pb/Ba free.

APPLICATIONS

Ideal hose for the transfer and transport of drinking water, fertilizers and other liquids for agricultural and industrial irrigation.

TEMPERATURES

From -10°C to +60°C

ø Interior mm	Wall thickness mm	Weight g/m	Working pressure bar	Burst pressure bar	Elongation %	Dilatation %	Code
25	1,6	180	6	18	± 7	± 10	AE223P025
30	1,6	200	6	18	± 7	± 10	AE223P030
35	1,6	240	6	18	± 7	± 10	AE223P035
40	1,6	280	6	18	± 7	± 10	AE223P040
45	1,6	320	6	18	± 7	± 10	AE223P045
50	1,6	375	6	18	± 7	± 10	AE223P050
55	1,8	400	6	18	± 7	± 10	AE223P055
63	1,8	430	5	15	± 7	± 10	AE223P063
70	1,8	450	4	12	± 7	± 10	AE223P070
75	1,8	550	4	12	± 7	± 10	AE223P075
80	1,8	560	4	12	± 7	± 10	AE223P080
90	2,1	660	4	12	± 7	± 10	AE223P090
100	2,1	760	3,5	10,5	± 7	± 10	AE223P100
110	2,2	1000	3,5	10,5	± 7	± 10	AE223P110
125	2,2	1180	3,5	10,5	± 7	± 10	AE223P125
150	2,2	1300	3,5	10,5	± 7	± 10	AE223P150
204	2,2	1600	4	12	± 7	± 10	AE223P203