


DIN 2642 PN10 PIPE MM

Flanges Presadas

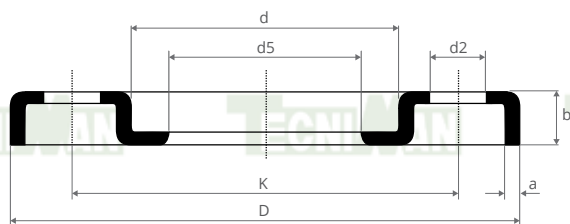

TEMPERATURE

Maximum 200°C

MATERIALS

Stainless Steel 1.4307 / A-304L
Stainless Steel 1.4404 / A-316L

CODE

FIC512

ø ND mm	Flange						Screw			
	d	d5	D	a	b	k	Quant.	Thread	d2	
PN10 = PN16	15	38	24	95	3	11,5	65	4	M12	13,5
	20	48	30	105	3	14	75	4	M12	13,5
	25	53	34	115	3	16	85	4	M12	13,5
	32	68	40	140	3	16,5	100	4	M16	17,5
	40	77	48	150	3	17,5	110	4	M16	17,5
	50	91	58	165	3	19,5	125	4	M16	17,5
	65	108	78	185	3	21	145	4	M16	17,5
	80	123	90	200	3	22	160	8	M16	17,5
	100	141	110	220	4	23	180	8	M16	17,5
	125	168	134	250	4	25	210	8	M16	17,5
150	192	159	285	5	27	240	8	M20	21,5	
PN10	200	245	212	340	6	31	295	8	M20	21,5
	250	295	262	395	6	34	350	12	M20	21,5
	300	345	312	445	6	38	400	12	M20	21,5
	350	398	362	505	8	35	460	16	M20	22
	400	456	413	565	8	35	515	16	M24	26