


EN 1092-1-01 PN10 PIPE ISO

Flat Flanges

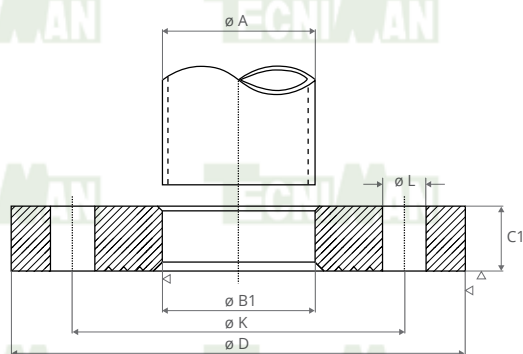

CHARACTERISTICS

DIN 2576 - PN10

MATERIALS

Stainless Steel 1.4307 / A-304L
Stainless Steel 1.4404 / A-316L

TYPE

TYPE A (flat face)

CODE

FIC50110

ø ND mm	Pipe A	Flange				Screw			
		B1	D	C1	K	Quant.	Thread	L	
PN10 = PN16 = PN25 = PN40	15	21,3	22,0	95	14	65	4	M12	14
	20	26,9	27,5	105	16	75	4	M12	14
	25	33,7	34,5	115	16	85	4	M12	14
	32	42,4	43,5	140	(16) 18	100	4	M16	18
	40	48,3	49,5	150	(16) 18	110	4	M16	18
	50	60,3	61,5	165	(18) 20	125	4	M16	18
PN10 = PN16	65	76,1	77,5	185	(18) 20	145	(4) 8	M16	18
	80	88,9	90,5	200	20	160	8	M16	18
	100	114,3	116,0	220	(20) 22	180	8	M16	18
	125	139,7	141,5	250	22	210	8	M16	18
	150	168,3	170,5	285	(22) 24	240	8	M20	22
PN10	200	219,1	221,5	340	24	295	8	M20	22
	250	273,0	276,5	395	26	350	12	M20	22
	300	323,9	327,5	445	26	400	12	M20	22
	350	355,6	359,5	505	30	460	16	M20	22
	400	406,4	411,0	565	32	515	16	M24	26
	450	457,0	462,3	615	36	565	20	M24	26
	500	508,0	513,5	670	38	620	20	M24	26
	600	610,0	616,5	780	(40) 42	725	20	M27	30

* Measurements in brackets according to DIN2576 PN10

PN10 FLANGES REDUCED THICKNESS									
PN10	700	711,0	716,0	895	42 (50)	840	24	M27	30
	800	813,0	818,0	1015	44 (56)	950	24	M30	33
	900	914	920,0	1115	48 (62)	1050	28	M30	33
	1000	1016	1022,0	1230	50 (70)	1160	28	M33	36

* Measurements in brackets according to EN1092-1 PN10

FLANGE FOR FOOD PIPE

ø ND mm		Pipe A	Flange				Screw		
			B ₁	D	C ₁	K	Quant.	Thread	L
PN16	50	50,8	51,5	165	18	125	4	M16	18
	50	63	63,5	165	18	125	4	M16	18

TECNI MAN

Camino del fus, 59 • 46470 Massanassa, Valencia (SPAIN)
T. +34 96 125 30 55 • Fax +3496 125 00 45 • info@tecniman.es • www.tecniman.es