


EN 1092-1-01 PN10 THREADED. According to EN 10226-3 (ISO 7/1)

Threaded Flange

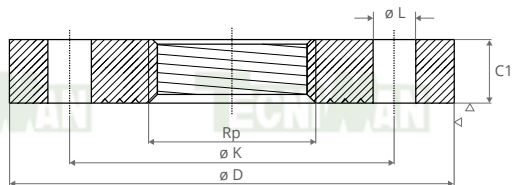

CHARACTERISTICS

DIN 2576 - PN10

MATERIALS

Stainless Steel 1.4307 / A-304L
Stainless Steel 1.4404 / A-316L

TYPE

TYPE A (flat face)

CODE

FIC504

Ø ND mm	Pipe d1	Flange				Screw		
		Rp	D	C1	K	Quant.	Thread	L
15	21,3	1/2"	95	14	65	4	M12	14
20	26,9	3/4"	105	16	75	4	M12	14
25	33,7	1"	115	16	85	4	M12	14
32	42,4	1.1/4"	140	18 (16)	100	4	M16	18
40	48,3	1.1/2"	150	18 (16)	110	4	M16	18
50	60,3	2"	165	20 (18)	125	4	M16	18
65	76,1	2.1/2"	185	20 (18)	145	8 (4)	M16	18
80	88,9	3"	200	20	160	8	M16	18
100	114,3	4"	220	22 (20)	180	8	M16	18

* Measurements in brackets according to DIN2576

TECNIMAN

Camino del fus, 59 • 46470 Massanassa, Valencia (SPAIN)
T. +34 96 125 30 55 • Fax +3496 125 00 45 • info@tecniman.es • www.tecniman.es