


EN 1092-1-05 PN10 BLIND

Flat Flanges

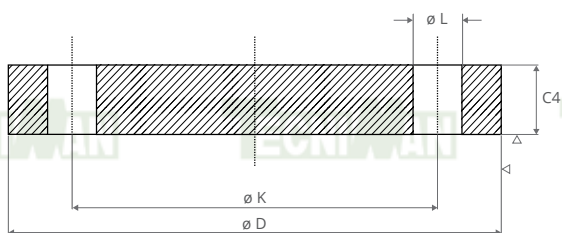

CHARACTERISTICS

DIN 2527 - PN10

MATERIALS

Stainless Steel 1.4307 / A-304L
Stainless Steel 1.4404 / A-316L

TYPE

TYPE A (flat face)

CODE

FIC50210

ø ND mm	Flange			Screw			
	D	C ₄	K	Quant.	Thread	L	
PN10 = PN16 = PN25 = PN40	15	95	14 (16)	65	4	M12	14
	20	105	(16) 18	75	4	M12	14
	25	115	(16) 18	85	4	M12	14
	32	140	(16) 18	100	4	M16	18
	40	150	(16) 18	110	4	M16	18
PN10 = PN16	50	165	18	125	4	M16	18
	65	185	18	145	(4) 8	M16	18
	80	200	20	160	8	M16	18
	100	220	20	180	8	M16	18
	125	250	22	210	8	M16	18
	150	285	22	240	8	M20	22
PN10	200	340	24	295	8	M20	22
	250	395	26	350	12	M20	22
	300	445	26	400	12	M20	22
	350	505	26	460	16	M20	22
	400	565	26	515	16	M24	26
	450	615	28	565	20	M24	26
	500	670	28	620	20	M24	26
	600	780	34 (30)	725	20	M27	30

* Measurements in brackets according to DIN2576 PN10

FLANGES PN10 REDUCED THICKNESS							
PN10	700	895	38 (32)	840	24	M27	30
	800	1015	48 (36)	950	24	M30	33

* Measurements in brackets according to EN1092-1 PN10