

EN-856 4SH

CHARACTERISTICS


Hose with interior layer of synthetic rubber, resistant to hydraulic oil, and exterior layer of black synthetic rubber, resistant to oil, abrasion and weather. It is also reinforced with four metallic meshes.

APPLICATIONS

Ideal hose for use in lines of very high pressure. Apt for fluids based on petroleum, water, and for oils and lubricants.

TEMPERATURES

From -40°C to +100°C, up to +125°C in discontinuous use.

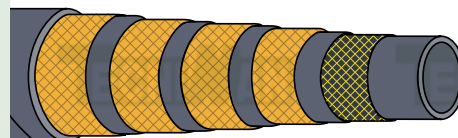

Ø Interior inches	Ø Interior mm.	Ø Exterior mm.	Working pressure Bar	Burst pressure Bar	Curvature radius mm.	Code
3/4"	19	32,2	420	1680	280	RCVMAN0412
1"	25,4	38,7	380	1520	340	RCVMAN0416
1" 1/4	31,8	45,5	325	1300	460	RCVMAN0420
1" 1/2	38,1	53,5	290	1160	560	RCVMAN0424
2"	50,8	68,1	250	1000	700	RCVMAN0432