

THERMOPLASTIC WITH A METALLIC MESH

CHARACTERISTICS


Thermoplastic hose with interior layer of polyamide and exterior layer of black polyurethane. It is also reinforced with a metallic mesh.

APPLICATIONS

Ideal hose for use in high pressure hydraulic lines. Apt for the passage of oils, isocyanates, paints, varnishes and solvents.

TEMPERATURES

From -40°C to +100°C, limited to +70°C for air and fluids of aqueous solution.

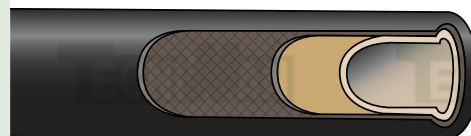

Ø Interior inches	Ø Interior mm.	Ø Exterior mm.	Working pressure Bar	Burst pressure Bar	Curvature radius mm.	Code
3/16"	4,8	10	325	1300	35	RCVMAN7703
1/4"	6,4	11,9	300	1200	40	RCVMAN7704
5/16"	8	14	240	960	50	RCVMAN7705
3/8"	9,5	16	225	900	60	RCVMAN7706
1/2"	12,7	20,5	175	700	75	RCVMAN7708