


DRAINS

High pressure hydraulic hoses

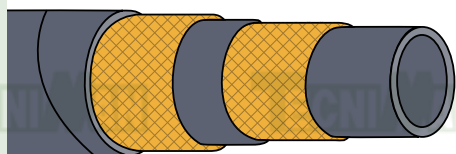

CHARACTERISTICS

Hose with interior of smooth black SBR rubber and exterior layer of SBR/NR rubber. Also, it is reinforced with two textile meshes.

APPLICATIONS

High pressure cleaning of drainage tubes and heavy cleaning application with high pressure water. It has numerous advantages with respect to conventional hydraulic hoses for cleaning such as greater durability and lightness and higher resistance to abrasion.

TEMPERATURES

From -30°C to +80°C

ø Interior inches	ø Interior mm.	ø Exterior mm.	Bar working pressure	Bar burst pressure	Weight kg/mts.	Code
1/2"	13	25	250	625	0,51	RCVMANZK08
3/4"	19	31	250	625	0,60	RCVMANZK12
1"	25	39	250	625	0,95	RCVMANZK16

NOTE The standard sections are 60-80-100 and 120 mts., they can be provided compressed with BSP male-female connectors.