


SAE 100 R1AT EN-853 1SN

High pressure hydraulic hoses

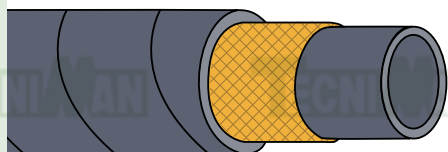

CHARACTERISTICS

Hose with interior layer of black synthetic rubber, oil resistant, and exterior layer of synthetic rubber which is resistant to oil, abrasion and weather. It is also reinforced with a metallic mesh.

APPLICATIONS

Ideal hose for use in low and medium pressure lines. Apt for fluids based on petroleum, water and for oils and lubricants.

TEMPERATURES

From -40°C to +100°C, up to +125°C in discontinuous use.

ø Interior inches	ø Interior mm.	ø Exterior mm.	Bar working pressure	Bar burst pressure	Curvature radius mm.	Code
1/4"	6,4	13,4	225	900	100	RCVMAN1104
5/16"	7,9	15	215	850	115	RCVMAN1105
3/8"	9,5	17,4	180	720	130	RCVMAN1106
1/2"	12,7	20,6	160	640	180	RCVMAN1108
5/8"	15,9	23,7	130	520	200	RCVMAN1110
3/4"	19	27,7	105	420	240	RCVMAN1112
1"	25,4	35,6	88	350	300	RCVMAN1116
1" 1/4	31,8	43,5	63	250	420	RCVMAN1120
1" 1/2	38,1	50,6	50	200	500	RCVMAN1124
2"	50,8	64	40	160	630	RCVMAN1132