


# SAE 100 R7 EN-855

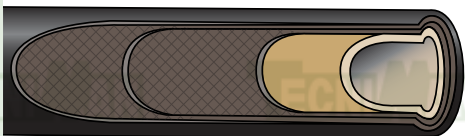

## CHARACTERISTICS

Thermoplastic hose with interior layer of polyester elastomer and exterior layer of black polyurethane. It is also reinforced with two textile meshes.

## APPLICATIONS

Ideal hose for use in high pressure hydraulic lines. Apt for the passage of oils, isocyanates, paints, varnishes and solvents.

## TEMPERATURES

From -40°C to +100°C, limited to +70°C for air and fluids of aqueous solution.

ø Interior mm.	ø Exterior mm.	Bar working pressure	Bar burst pressure	Radio curvatura mm.	Code
4.8	10	210	840	35	RCVMAN07VE73
6.4	11.8	200	800	50	RCVMAN07VE74