


# SPRING PU OLIVE OIL

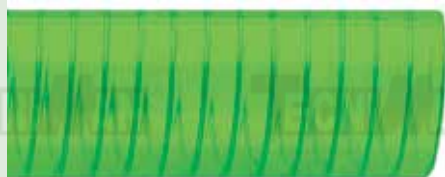

## CHARACTERISTICS

Translucent green hose made of flexible PVC outside and polyurethane inside, reinforced with a spiral of galvanised steel. Smooth inner and outer wall. Resistant to atmospheric agents and various chemical products. Non-toxic and for food use according to European regulations CE 1935/2004 and UE 10/2011. Phthalate free.

## APPLICATIONS

Ideal hose for the suction and discharge of vegetable oils (olive, sunflower, soybean...) and those liquid foods that require food simulant D2. In addition, the inner layer of polyurethane gives it great resistance to abrasion.

## TEMPERATURES

From -20°C to +80°C

| ø Interior mm | Wall thickness mm | Weight g/m | Working pressure bar | Burst pressure bar | Curvature radius mm | Vacuum mH <sub>2</sub> O | Roll m | Code     |
|---------------|-------------------|------------|----------------------|--------------------|---------------------|--------------------------|--------|----------|
| 40            | 4,8               | 950        | 9                    | 27                 | 80                  | 9                        | 50     | AE229040 |
| 45            | 4,9               | 1150       | 9                    | 27                 | 90                  | 9                        | 50     | AE229045 |
| 50            | 5,4               | 1300       | 7                    | 21                 | 100                 | 9                        | 50     | AE229050 |
| 55            | 5,4               | 1460       | 6                    | 18                 | 110                 | 9                        | 50     | AE229055 |
| 60            | 6                 | 1750       | 6                    | 18                 | 120                 | 9                        | 50     | AE229060 |
| 65            | 6,1               | 1900       | 5                    | 15                 | 130                 | 9                        | 50     | AE229065 |
| 70            | 6,1               | 2100       | 5                    | 15                 | 140                 | 9                        | 50     | AE229070 |
| 75            | 6,5               | 2250       | 5                    | 15                 | 150                 | 9                        | 50     | AE229075 |
| 80            | 6,5               | 2500       | 4                    | 12                 | 160                 | 9                        | 50     | AE229080 |
| 90            | 7                 | 2900       | 4                    | 12                 | 180                 | 9                        | 30     | AE229090 |
| 102           | 7                 | 3650       | 3                    | 9                  | 200                 | 9                        | 30     | AE229102 |
| 105           | 7,2               | 3850       | 3                    | 9                  | 210                 | 9                        | 30     | AE229105 |
| 110           | 7,2               | 3950       | 3                    | 9                  | 220                 | 9                        | 30     | AE229110 |
| 120           | 8                 | 4300       | 3                    | 9                  | 240                 | 9                        | 30     | AE229120 |
| 125           | 8                 | 4600       | 3                    | 9                  | 250                 | 9                        | 30     | AE229125 |
| 150           | 10                | 6600       | 2,5                  | 7,5                | 300                 | 9                        | 30     | AE229150 |