


SUPERELASTIC TRANSFOR

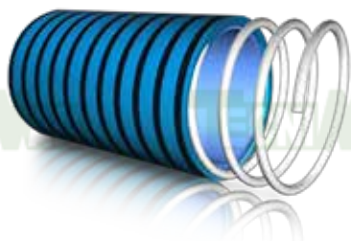

CHARACTERISTICS

Blue hose made of flexible PVC that is super elastic and reinforced with spiral of rigid non-deformable PVC. Smooth interior wall to prevent sediment formation and to facilitate sterilization work. Non-toxic but not for food use. Resistant to abrasion, atmospheric agents and various chemical products. Curvature radius 4xDi.

APPLICATIONS

Ideal hose for the aspiration and discharge of industrial water in the cleaning of sewers, black wells and septic tanks. Particularly adapted to mount in trailers of collection and distribution of slurries.

TEMPERATURES

From -25°C to +60°C.

ø Interior mm	Wall thickness mm	Weight g/m	Working pressure bar	Burst pressure bar	Curvature radius mm	Vacuum mH ₂ O	Roll m	Code
40	4,5	730	6	18	160	9	50	AD207040
45	5,0	900	6	18	180	9	50	AD207045
50	5,2	1050	5	15	200	9	50	AD207050
60	5,5	1250	4,5	13,5	240	9	50	AD207060
63	6,0	1390	4,5	13,5	250	9	50	AD207063
70	6,5	1600	4,5	13,5	280	9	50	AD207070
75	6,5	1700	4	12	300	9	50	AD207075
80	6,5	1850	3,5	10,5	320	9	50	AD207080
90	6,7	2250	3,5	10,5	360	9	30	AD207090
102	7,3	2700	3	9	410	9	30	AD207102
105	7,4	2900	3	9	420	9	30	AD207105
110	7,5	3100	3	9	440	9	20	AD207110
120	8,0	3600	2,5	7,5	480	9	20	AD207120
125	8,3	3900	2,5	7,5	500	9	20	AD207125
150	9,5	5000	2	6	600	9	20	AD207150
200	12,1	10000	2	6	800	9	6	AD207200
250	12,1	12400	1,5	4,5	1000	9	6	AD207250