


SPRING REINFORCED

Hoses for liquids

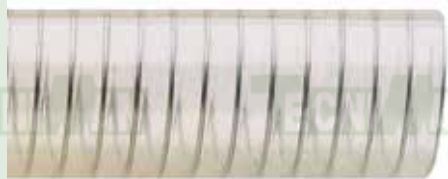

CHARACTERISTICS

Translucent hose made of flexible PVC and reinforced with galvanized steel spiral. Smooth interior and exterior wall. Resistant to atmospheric agents and various chemical products. Non-toxic and suitable for food use according to European regulations ce 1935/2004 and EU 10/2011. Phthalate free.

APPLICATIONS

Ideal hose for the aspiration and discharge of industrial liquids and chemical products. Valid for transfer of food liquids that require food simulants A, B, C, D1 under OM2 conditions according to European regulation EU 10/2011, such as wines, beers, vinegars, dairy products and alcoholic liquids up to 50°.

TEMPERATURES

From -10°C to +60°C

ø Interior mm	Wall thickness mm	Weight g/m	Working pressure bar	Burst pressure bar	Curvature radius mm	Vacuum mH ₂ O	Roll m	Code
10	3,1	180	9	27	20	9,0	50	AE225010
12	3,1	190	9	27	20	9,0	50	AE225012
13	3,1	210	9	27	26	9,0	50	AE225013
14	3,1	230	9	27	28	9,0	50	AE225014
16	3,1	260	9	27	32	9,0	50	AE225016
20	3,5	365	9	27	40	9,0	50	AE225020
22	3,5	400	9	27	44	9,0	50	AE225022
25	4,0	520	9	27	50	9,0	50	AE225025
30	4,2	630	9	27	60	9,0	50	AE225030
32	4,2	660	9	27	64	9,0	50	AE225032
35	4,3	750	9	27	70	9,0	50	AE225035
38	4,5	800	9	27	76	9,0	50	AE225038
40	4,8	950	9	27	80	9,0	50	AE225040
42	4,8	1040	9	27	84	9,0	50	AE225042
45	4,9	1150	9	27	90	9,0	50	AE225045
50	5,4	1300	7	21	100	9,0	50	AE225050
55	5,4	1460	6	18	110	9,0	50	AE225055
60	6,0	1750	6	18	120	9,0	50	AE225060
63	6,1	1800	6	18	125	9,0	50	AE225063
65	6,1	1900	5	15	130	9,0	50	AE225065
70	6,1	2100	5	15	140	9,0	50	AE225070
75	6,5	2250	5	15	150	9,0	50	AE225075
76	6,5	2300	5	15	150	9,0	50	AE225076
80	6,5	2500	4	12	160	9,0	50	AE225080
90	7,0	2900	4	12	180	9,0	30	AE225090
102	7,0	3650	3	9	200	9,0	30	AE225102
105	7,2	3850	3	9	210	9,0	30	AE225105
110	7,2	3950	3	9	220	9,0	30	AE225110
120	8,0	4300	3	9	240	9,0	30	AE225120
125	8,0	4600	3	9	250	9,0	30	AE225125
152	10	6600	2,5	7	300	9,0	20	AE225152

NOTA Certified version available for the transfer of vegetable oils and those liquid foods that require D2 food simulant according to EU regulation 10/2011.

TECNI MAN

Camino del fus, 59 • 46470 Massanassa (Valencia - Spain)
P. 96 125 30 55 • Fax 96 125 00 45 • info@tecniman.es • www.tecniman.es