


# EN 1092-1-01 PN25 PIPE ISO

Flat Flanges

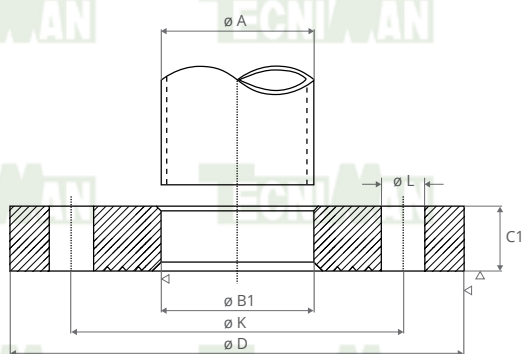

## CHARACTERISTICS

DIN 2503 - PN25

## MATERIALS

Stainless Steel 1.4307 / A-304L  
Stainless Steel 1.4404 / A-316L

## TYPE

TYPE A (flat face)

## CODE

FIC50125

| ø ND mm     | Pipe A | Flange         |       |                |    | Screw  |        |     |    |
|-------------|--------|----------------|-------|----------------|----|--------|--------|-----|----|
|             |        | B <sub>1</sub> | D     | C <sub>1</sub> | K  | Quant. | Thread | L   |    |
| PN25 = PN40 | 65     | 76,1           | 77,5  | 185            | 22 | 145    | 8      | M16 | 18 |
|             | 80     | 88,9           | 90,5  | 200            | 24 | 160    | 8      | M16 | 18 |
|             | 100    | 114,3          | 116,0 | 235            | 26 | 190    | 8      | M20 | 22 |
|             | 125    | 139,7          | 141,5 | 270            | 28 | 220    | 8      | M24 | 26 |
|             | 150    | 168,3          | 170,5 | 300            | 30 | 250    | 8      | M24 | 26 |
| PN25        | 200    | 219,1          | 221,5 | 360            | 32 | 310    | 12     | M24 | 26 |
|             | 250    | 273            | 276,5 | 425            | 35 | 370    | 12     | M27 | 30 |
|             | 300    | 323,9          | 327,5 | 485            | 38 | 430    | 16     | M27 | 30 |